


colour fastness  
cabinets



VeriVide.com

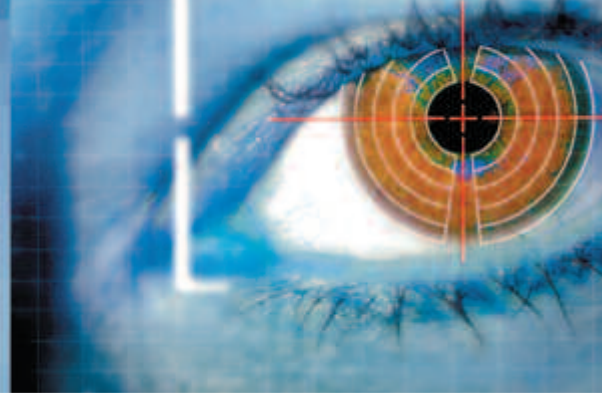

## Colour Fastness Cabinets

The VeriVide Colour Fastness Grading Cabinet (CF\_60) provides perfect viewing conditions for the grading and assessment of samples for Colour Fastness, according to BS EN ISO 105 and retailer specifications.

The VeriVide CF\_60 is fitted with two light sources, the principle one being the VeriVide "Artificial Daylight" D65 at 6500 Kelvin, providing the best D65 to CIE ratings in its sector, along with UV Black light to reveal the presence of fluorescent dyes and bleaches.

To optimise consistency of viewing conditions the cabinet features a built-in Fixed Angle Table, which enables samples to be viewed at a 45° angle of incidence to the lightsource, and the interior colour of the cabinet is finished to a neutral grey. The lamps are housed with a specially selected

white reflector, and controlled with a unique VeriVide digital control panel, which includes a servicing indicator, back lit screen and data storage facility.

In addition to Colour Fastness grading some applications also require the facility for full colour matching and assessment, which needs additional or alternative light sources, for example, Point of Sale illuminate TL84. If required, please refer to our standard Colour Assessment Cabinet (CAC) range. Contact the sales department for more information or email: [enquiries@verivide.com](mailto:enquiries@verivide.com)

colour fastness  
cabinet DATA





Below is an illustration of a typical product order code for a CF\_60. To create your own product order code, simply fill in the blue boxes in [Table 1](#) by following the quick step-by-step guide below, or visit [www.verivide.com](http://www.verivide.com) where the process is fully automated within the product catalogue section.

### Typical Product Order Code

Style	Size	Light Source 1	Light Source 2	Interior Colour	Voltage
CAC	CF_60	D65	UV	N5	230v

**Table 1 – Your Product Order Code**

Style	Size	Light Source 1	Light Source 2	Interior Colour	Voltage
CAC	CF_60	D65	UV		

Size (dimensions in mm)		Width	Height	Depth
CF_60	Overall	710	545	480
	Viewing Cavity	680	335	380

1. In order to view your samples objectively without the influence of surround or background colours, the [Interior](#) of the cabinets are finished in a neutral matt grey. All cabinets are normally supplied with the interior grey reference Munsell N5, but can be supplied with an alternative of Munsell N7 or G5574. Please specify in [Table 1](#).

Interior Colour	Munsell Grey N5	Munsell Grey N7	Grey: G5574

2. Please select the [Voltage](#) you require for your cabinet by specifying in [Table 1](#).

Voltage	230v	110v

VeriVide offers a range of accessories and optional items. To see which accessories are available with the CF\_60, please refer to [Table 2](#), and [Data Sheet/pdf – Accessories](#) for more information.

**Table 2 - Accessories available for the CAC CF Cabinets**

	Fixed Angle Table	Tilting Table	Diffuser	Benches	Cupboards	Maintenance Pack	Replacement Lamps
CF_60	STANDARD	-	-	✓	✓	✓	✓